

ZZGC TECHNOLOGY LIMITED

UV light Sterilizer

Introduction


ZZGC UV light sterilizer adopts world's leading low pressure and high strength UV tube , its service life is above 10000 hours.

Adopting high light transmittance. High purity quartz drive pipe which ensure UV ray penetration rate above 90%

Adopting world advanced constant and high strength UV special ballast to ensure the whole system operate normally in a complex condition

Adopting high quality stainless steel 304 or 316 reactor inner wall is special polished to improve sterilization effect.

Apply to area:

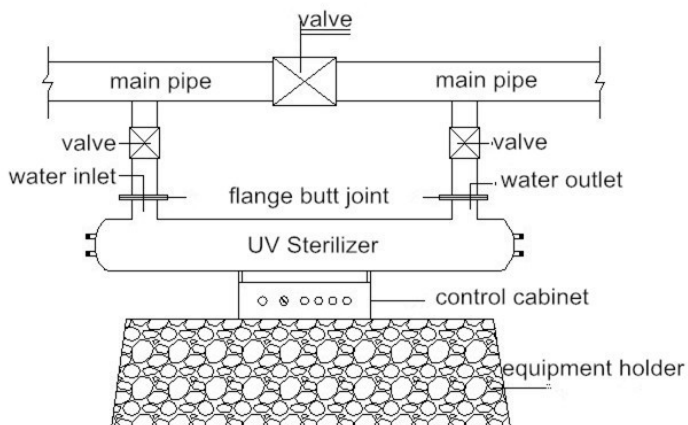

产品型号	处理水量 T/H	进口管径 mm	功率 W	工作压力 MPa
GYC-UUVC-15	0.5	15	15	0.4
GYC-UUVC-23	1	20	23	0.4
GYC-UUVC-40	1.5-2	25	40	0.6
GYC-UUVC-75	4-5	32	55	0.6
GYC-UUVC-120	9-10	40	120	0.6
GYC-UUVC-150	12-15	50	150	0.6
GYC-UUVC-240	22-25	50	240	0.6

产品型号	处理水量 T/H	进口管径 mm	功率 W	工作压力 MPa
GYZ-UUVC-225	22-25	50	225	0.6
GYZ-UUVC-360	32-35	80	360	0.6
GYZ-UUVC-600	50-60	100	600	0.8
GYZ-UUVC-840	70-80	125	840	0.8
GYZ-UUVC-960	90-95	133	960	0.8
GYZ-UUVC-1440	140-150	150	1440	0.8
GYZ-UUVC-1920	180-200	150	1920	0.8
GYZ-UUVC-2400	230-250	200	2400	0.8
GYZ-UUVC-2800	280-300	200	2800	0.8
GYZ-UUVC-3000	330-350	250	3000	1.0
GYZ-UUVC-3600	360-400	250	3600	1.0
GYZ-UUVC-4200	420-450	300	4200	1.0
GYZ-UUVC-4800	480-500	300	4800	1.0

